


SUPER MAXBIT

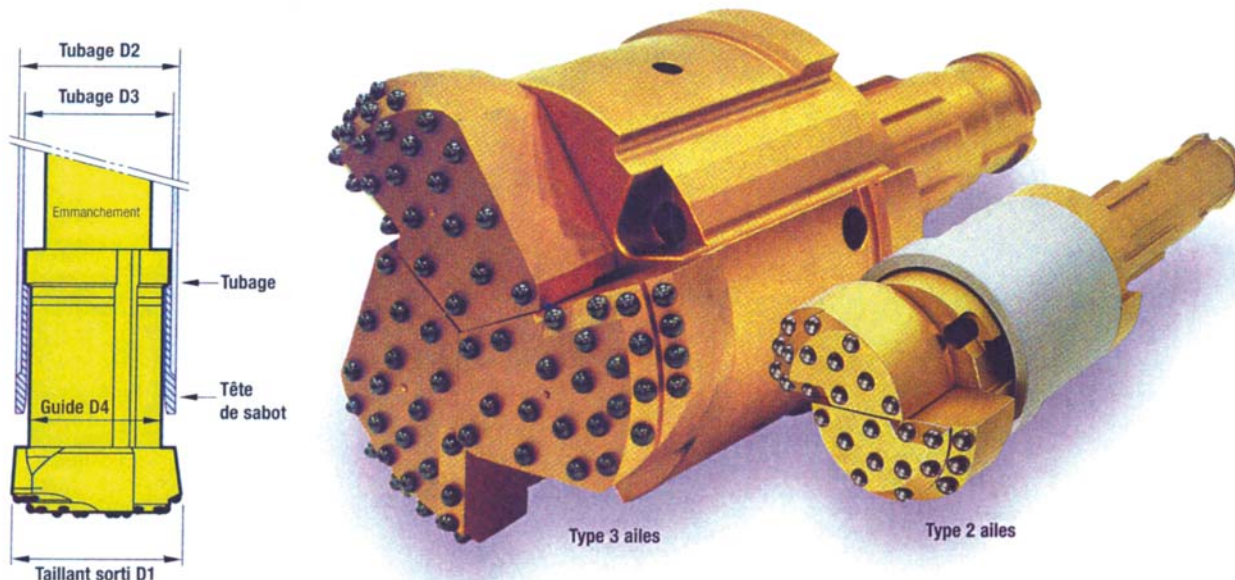

Type	Type 2 ailes	Type 3 ailes	EXTENSION DU TAILLANT		TUBAGE UTILISÉ			GUIDAGE D4 mm	Marteau fond de trou	❖ 1	❖ 2	❖ 3	❖ 4	❖ 5
			Sorti D1 mm	Rétracté mm	Max. O.D. mm	Min. I.D mm	Taille in.							
68	•		95	68	89,1	78,1	3"	69	DHD065, MACH20					
90	•		125	91	114,3	102,0	4"	92	DHD3.5, COP32, MACH33					
115	•		152	114	141,3	126,6	5"	115	SD-4, DHD304AP, COP42 MACH44, N4	↑				↑
128sc	•		172	127	152	132	4"	128	DHD 340, COP 44					
130sc	•		172	129	152	132	5"	130	DHD 350, COP 54					
140	•		185	140	168,3	153,2	6"	141	SD-5, DHD350R, COP52, MACH50, N55					
165	•		215	166	196,0	178,8	7"	167	SD-6, DH-6, COP62, N6					
187	•		237	186	222,0	202,3	8"	190	SD-6, DH-6, COP62, N6					
215	•		272	217	254,0	241,0	9"	218	SD-8, DHD380M, N80					
240		•	290	238	273,1	254,5	10"	240	SD-8, DHD380M, N80					
280		•	340	281	323,9	301,7	12"	283	SD-10, DHD310M, N100					
315		•	373	318	355,6	336,6	14"	320	SD-12,DHD112, N120					
365		•	425	363	406,4	387,4	16"	365	SD-12, DHD112,N120					
410		•	478	412	457,2	435,0	18"	414	SD-15,DHD112S, N120S					
460		•	530	461	508,0	482,6	20"	463	SD-15, DHD112S, N120S, SD-18, N180					
510		•	580	509	558,8	533,4	22"	511	SD-15, DHD112S, SD18, N180					
560		•	630	559	609,6	584,2	24"	561	SD-18, DHD120A, N180					
600		•	685	600	660,4	631,8	26"	603	DHD120A,N240					
650		•	737	650	711,2	679,2	28"	652	DHD120A, N240					
695		•	789	695	762,0	730,0	30"	697	DHD126, N240, N240S					
745		•	842	744	812,8	780,8	32"	746	DHD126, N240S					

- En cas de commande, veuillez indiquer les diamètres intérieur et extérieur du tubage
- Autres types non standard, fabrication sur demande.
- Autres emmanchements disponibles

- 1- Recherche d'eau
- 2 - Pieux, fondation
- 3 - Applications diverses
- 4 - Géothermie, forage pétrolier
- 5 - Micro-pieux